



Tech Support 1-800-265-1818  
http://usa.vdo.com

## Hall-Effect Sender

Instruction Sheet # A2C59519515

Rev 03-2011


### Replacing an Existing Speedometer Cable:

1. Remove the cable that went to the old speedometer.
2. Install the new sender in the place where the old cable was attached onto the transmission.

### First Time Installation:

1. Attach the sender onto the transmission at the location specified by the OEM for speedometer cable or sender installation.
2. Run the length of wire to the new speedometer.
3. Cut the wires to length and connect to the new speedometer according to the speedometer installation instructions.

Wire Color	Description
Red	Voltage 5-28 Vdc
Black	Ground
White	Signal

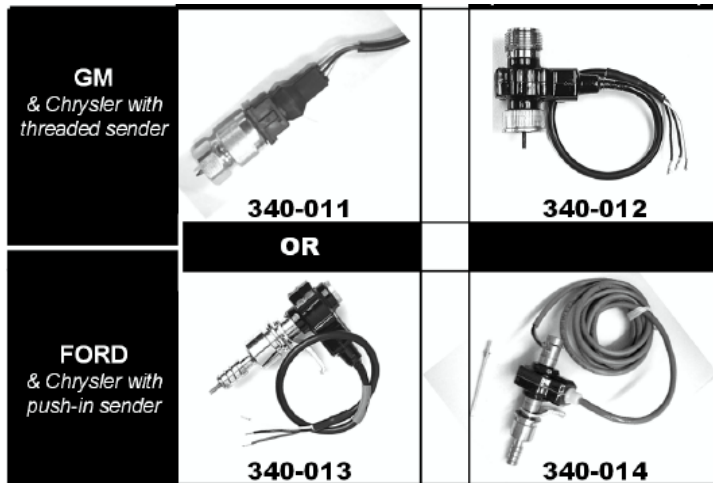

Merchandise warranted against defects in factory workmanship and materials for a period of 24 months after purchase. This warranty applies to the first retail purchaser and covers only those products exposed to normal use or service. Provisions of this warranty shall not apply to a VDO product used for a purpose for which it is not designed, or which has been altered in any way that would be detrimental to the performance or life of the product, or misapplication, misuse, negligence or accident. On any VDO part or VDO product found to be defective after examination by manufacturer, manufacturer will only repair or replace the merchandise through the original selling dealer. Manufacturer assumes no responsibility for diagnosis, removal and/or installation labor, loss of vehicle use, loss of time, inconvenience or any other consequential expenses. The warranties herein are in lieu of any other expressed or implied warranties, including any implied warranty of merchantability of fitness, and any other obligation on the part of manufacturer, or selling dealer.

**(NOTE: This is a "Limited Warranty" as defined by the Magnuson-Moss Warranty Act of 1975.)**